






TIGRES
Dr. Gerstenberg GmbH

Cable station MDK0

Pre-treatment of cable up to 12 mm diameter

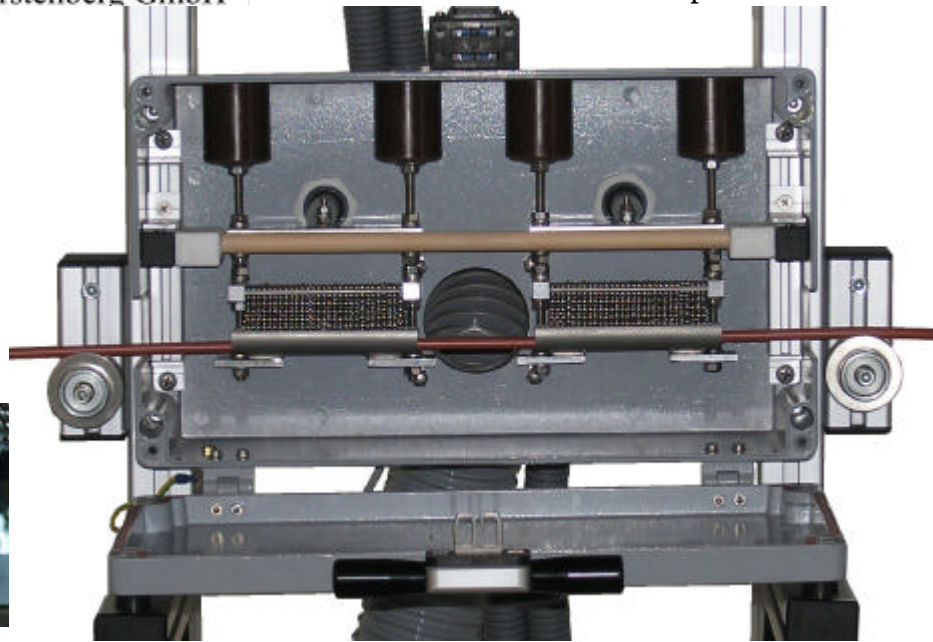

rack: optional

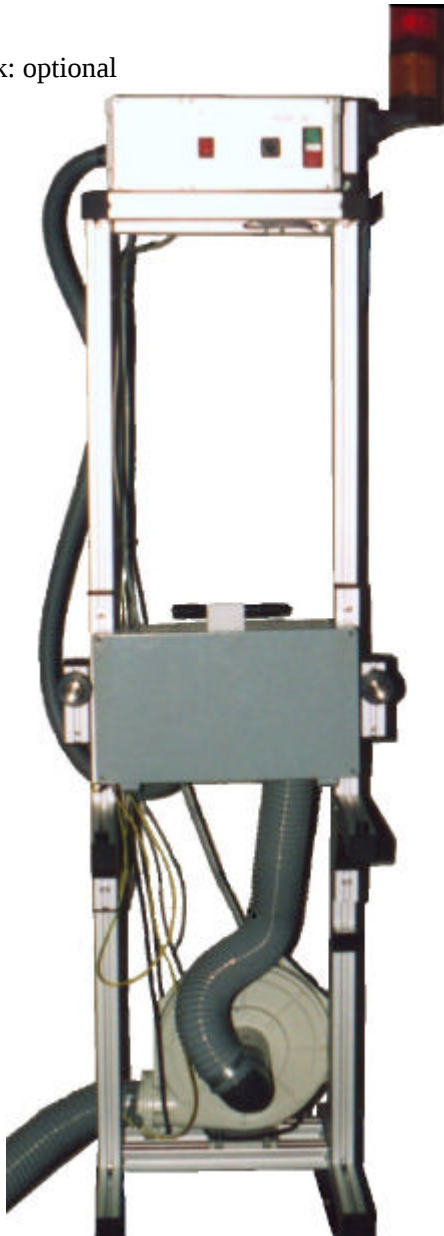

Highlights:

- for any metallic cable up to 12 mm diameter
- all-side treatment
- no damage of thin insulations
- high effective, soft treatment
- Best printing results
- no electric connection to the cable necessary
- compact design
- simple operation
- for any Ink-Jet and Offset-method
- Minimum insulation thickness required: appr. 0,5 mm

Technical information:

- Aluminium housing with security switch
- metallic electrode chains
- Stainless steel inlet- and outlet-roller
- Dimensions of the corona tool:
400 (+roller) x 230 x 110 mm
- effective discharge length: 2 x 100 mm
- electrical power: 400 W
- Connections:
Net: 230 V; 50/60 Hz
Exhaust gas Ø 75 mm
Interruption from line control
- Arbitrary cable direction

Options:

- effective discharge length: 2 x 200 mm
- Rack to mount generator, corona tool and blower
- Active coal filter