

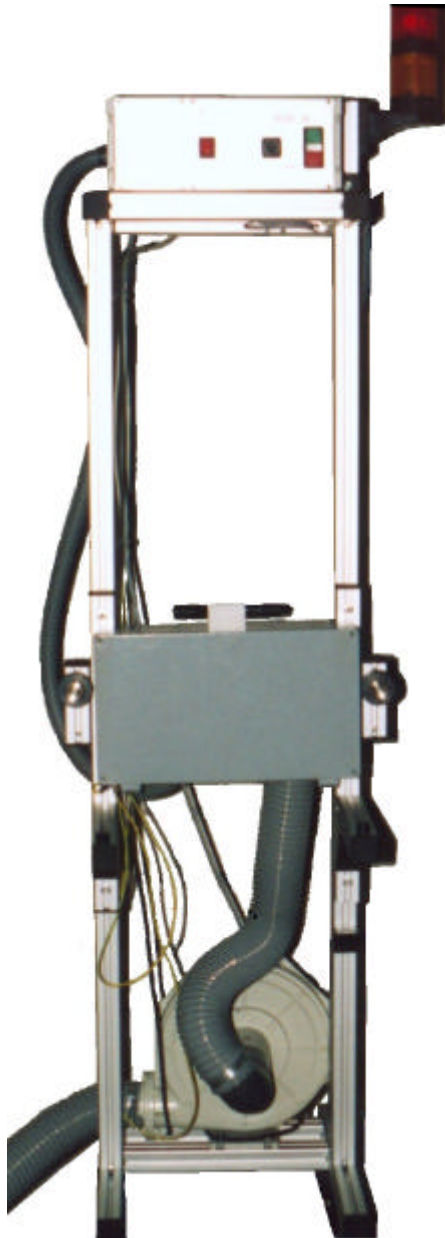


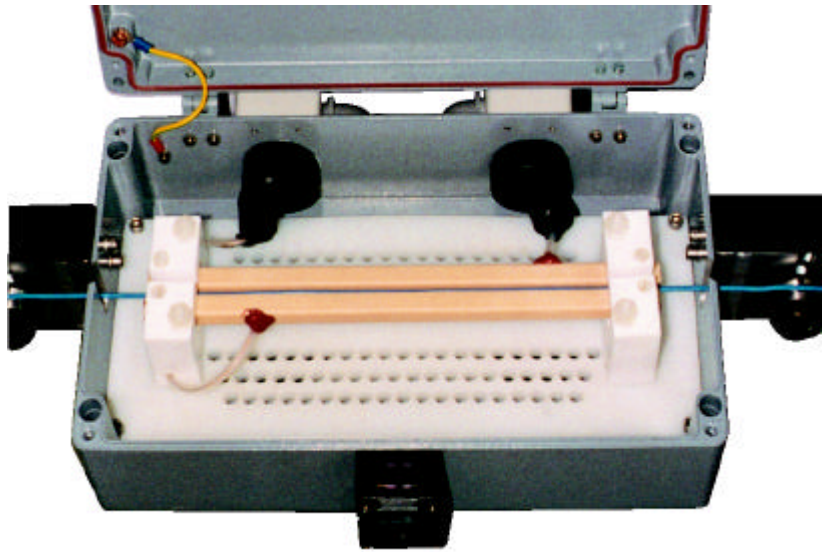

**TIGRES**  
Dr. Gerstenberg GmbH

## Cable station SKD-2,5<sup>2</sup>

Pre-treatment of cable up to 4 mm diameter



rack: optional

### Highlights:

- for any cable, tube and wire up to 4 mm diameter
- all-side treatment
- no damage of thin insulations
- high effective, soft treatment
- Best printing results
- no electric connection to the cable necessary
- compact design
- simple operation
- for any Ink-Jet and Offset-method

### Technical information:

- Aluminium housing with security switch
- Pair of ceramic electrodes
- Stainless steel inlet- and outlet-roller
- Dimensions of the corona tool:  
400 (+roller) x 230 x 110 mm
- effective discharge length: 230 mm
- electrical power: 400 W
- Connections:  
Net: 230 V; 50/60 Hz  
Exhaust gas Ø 75 mm  
Interruption from line control
- Arbitrary cable direction

### Options:

- effective discharge length: 430 mm
- Tool mounted up-right: access from the front, connections at the rear
- Rack to mount generator, corona tool and blower
- Active coal filter