




Cable station SKD-V

Corona treatment of cable up to 10 mm diameter





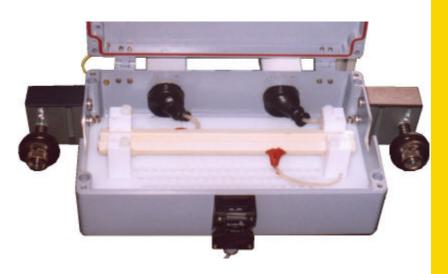



Option: rack

Highlights:

- Suitable for any cable, tubes and wires up to 10 mm diameter
- One-side treatment; if diameter smaller 4 mm: all sides
- No damage of thin insulations
- High efficient, gentle treatment
- Best printing results
- No electric connection to cable necessary
- Compact design
- Simple operation
- Suitable for any Ink-Jet and Offset-printing processes

Technical information:

- Cast-Al-housing with security switch
- Double ceramic electrodes
- Inlet- and outlet-roller of stainless steal
- Dimensions of the corona tool:

400 (+roller) x 230 x 110 mm

- Effective discharge length: 230 mm
- Electric power: 400 W
- Connections:

Mains: 230 V; 50/60 Hz Exhaust gas \emptyset 75 mm Interruption by line control

Arbitrary running direction

Options:

- Effective discharge length: 430 mm
- Treatment at the lower or upper side
- Rack for mounting of power supply, corona tool and blower
- Ozone absorber